

BARRIER GATE

Straight Arm (8', 10', 12', 18') (BGS-6xx) or Folding Arm (12') (BGF-6xx)

Add a Barrier Gate to an Entry Lane or Exit Lane to ensure parking lot control. This durable stainless steel gate has been proven in extreme temperatures.


- Servo motor with 2-6 second programmable open speed.
- Barrier arm auto-reverses upon contacting obstruction.
- Audible warning alarm during open & close cycles.
- Red/green illuminated panels on gate.
- Includes wireless receiver, and two remote controls to open/close barrier gate arm.
- Breakaway release arm (straight arm only).
- Weatherproof lock covers for door & lid.
- Key switch locks gate in open position.
- Auxiliary Power 5V 3A.
- Powder coated, stainless steel cabinet with slim profile.
- Single door access, removable top & manual clutch release.
- Easy arm mount, no special tools required for installation.
- Thermostatically controlled heater (operates to -40°F/-40°C).



OPTIONS

- Straight Arm or Folding Arm (adjustable height) includes reflective striping for high visibility.
- Red/green lights on gate arm for enhanced visibility.
- Protective rubber trim under gate arm.
- Additional Standard Remote (max 8) Upgrade Receiver for higher remote volumes (RAD-601 & RAD-506)
- Battery-backup for auto open on power loss.
- Human presence sensor detects presence of an object. Recommended in high pedestrian traffic areas. (VSS-100).
- Emergency Vehicle Siren Open (EVO-911).
- Emergency Vehicle Lights Detector (EVS-700).
- Spare Parts Kit/BOXX of Spare Parts (BSP-150).

RELATED ITEMS

- Loop (wire-only, PVC or saw cut), standard (2.5'x6') or oversize (5'x10') loop dimensions.
- Loop Detector – detects vehicle presence to arm or reset barrier gate or open if free in/out gate.
- Wayfinding Sensors & Signage.
- Parking Revenue & Access Control Parking Systems.
- Protective Bollard.

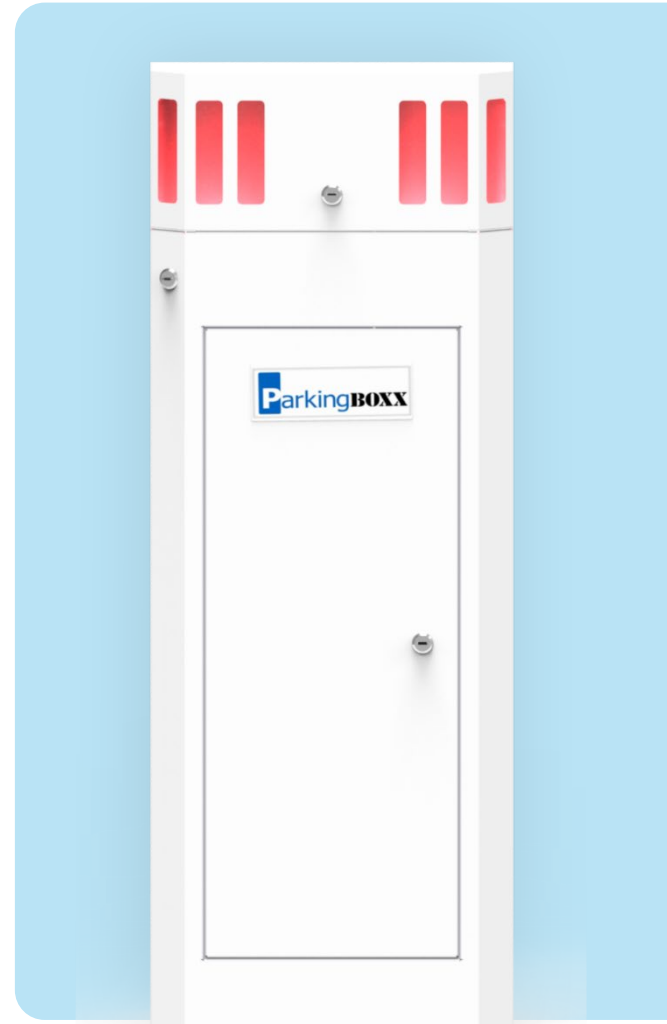

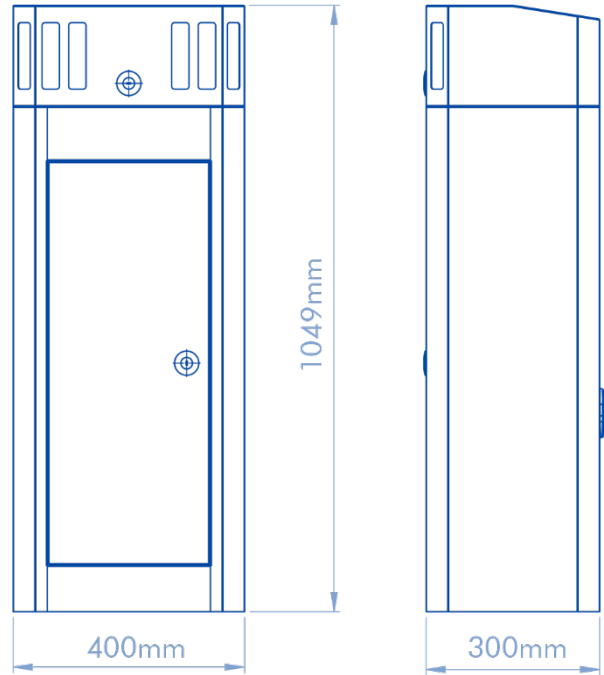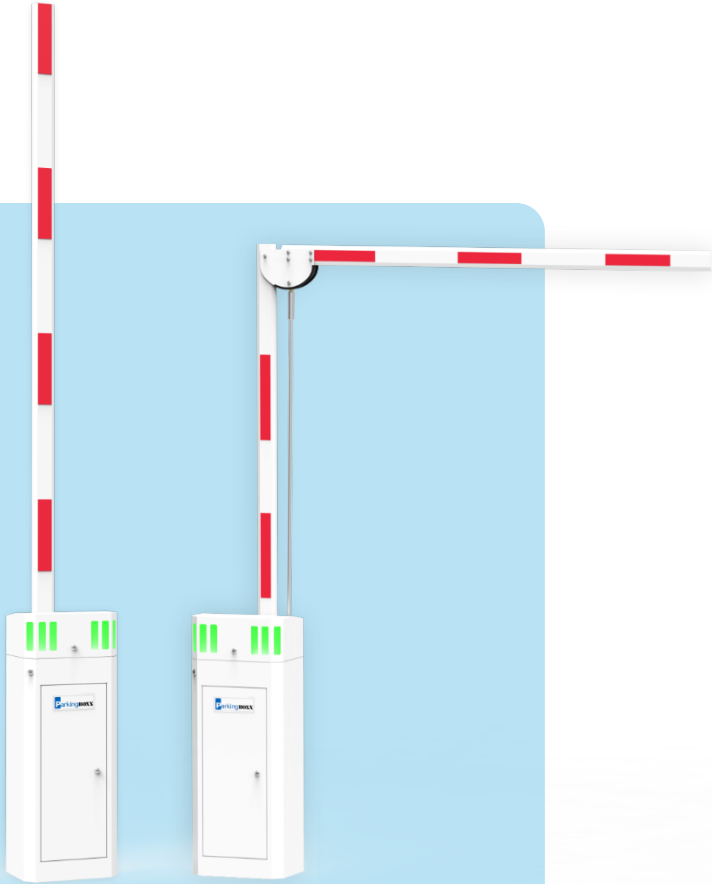

TECHNICAL SPECIFICATIONS

- Cabinet Size** – 41.3" x 15.8" x 11.8" (104.9cm x 40cm x 30cm) (l x w x d)
- Arm Options** – Straight Arm: 7' to 18' (breakaway option)
Folding Arm: 12' (adjustable height and length)
- Wireless Distance** – 65' (20m) with built in receiver, includes two remotes
- Locks** – Side door and removable top
- Operating Temp** – -4°F to 150°F (-20°C to 65°C). -40°F/C with optional heater
- Relative Humidity** – 98%
- Power** – 110-120VAC, 60Hz, 5A. Optional: backup battery
- Weight** – 130lbs (59kgs) without battery
- Housing** – 304-B Stainless steel with powder coating

- Warranty** – 1 year part warranty
- Certifications** – CSA